



AIR-FILTERS

Besides being able to provide a wide range of adaptable air cartridges, SOTRAS can offer OEMs a series of air filters that do not require a housing. These filters are recommended for 1 to 12 m³/min flow rates and can be installed vertically or horizontally.

This type of solution offers a low pressure drop and very simple installation and replacement procedures. (On specific requests we can offer fibreglass or oiled cellulose filtering media).

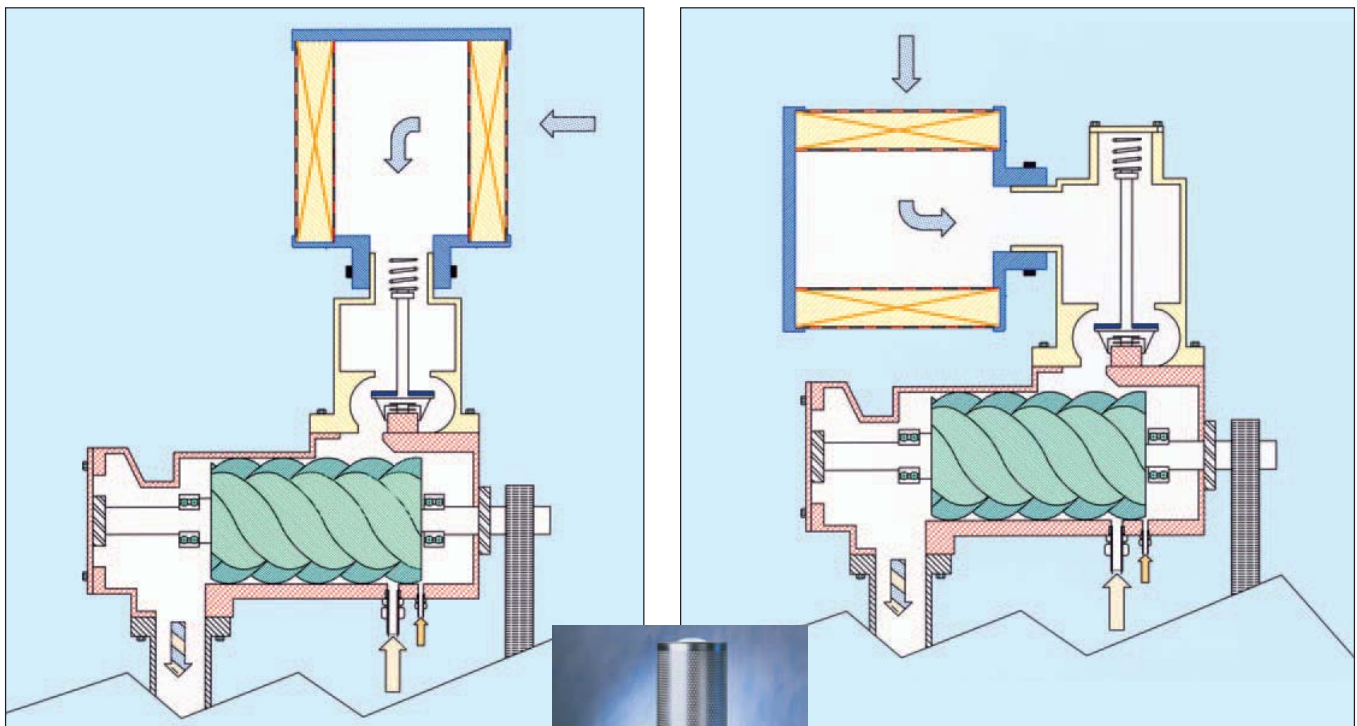

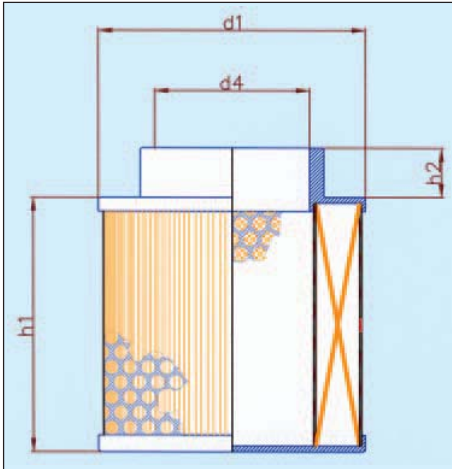

SOTRAS Ref.	d1 (mm)	d4 (mm)	h1 (mm)	h2 (mm)	Nominal flow rate (m3/min)
SA 6663	110	51	93	25	1
SA 6972	110	41	93	25	1
SA 6620	130	76	125	25	2
SA 6696	164	76	135	25	4
SA 6905	164	60	135	25	4
SA 6718	230	100	116	35	6

